

SPECIFICATIONS

- World's Latest Technologies
- High Density Galvanize Tank(2.5 mm Thick)
- More Strength
- PUF Insulation(50 mm)
- Marine Inside Coating
- Aluminium Embossed Side Cover
- G.I. Sheet Stand & G.I. Nipples
- Hot Dip Galvanize Base
- High Temperature
- Less Scale due to Tube Large Diameter
- Alkali(Kshar) Removal System

APPLICATIONS

- Household Water Heating
- Hotel & Restaurant & Hospital
- Industrial
- Commercial
- Swimming Pool & Health Club & Gym
- Boiler Feed Water Preheating
- Hostel & Dharma Shala
- Dairy Farm & Poultry Farm & Farm House



ETC SWH



Base



G.I. Stand




3 Layer Tube


PARTS	FEATURES	BENEFITS
Water Tank	Thick High Density G.I. Tank	Long Life & longer life for Any Water
	Side Cover Embossed with Insulation	Protection Against Corrosion
	More Strength	Whether Proof
	Marine Inside Coating	Strong Welding and Connections
ETC TUBES	Three Layer	Best Water Heating
	Super Vacuum Insulation	No Any Heat loss
Water Connection Nipples	G.I. Material	Whether Proof
	Thread Fitted With Welded Coupling	Strong Connections
Insulation	PUF	Reduce Heat Loss in Winter
Stand	Powder Coating	Whether Proof
	SS Material of Other Accessories	Protection Against Corrosion and rain Water
Extra Valve	Alkali(Kshar) Removal System	Increase Efficiency

Our Assurance : - We may design and installation of products.
 - Free plumbing guidance for any water system.

Overhead Tank Water Feeding System

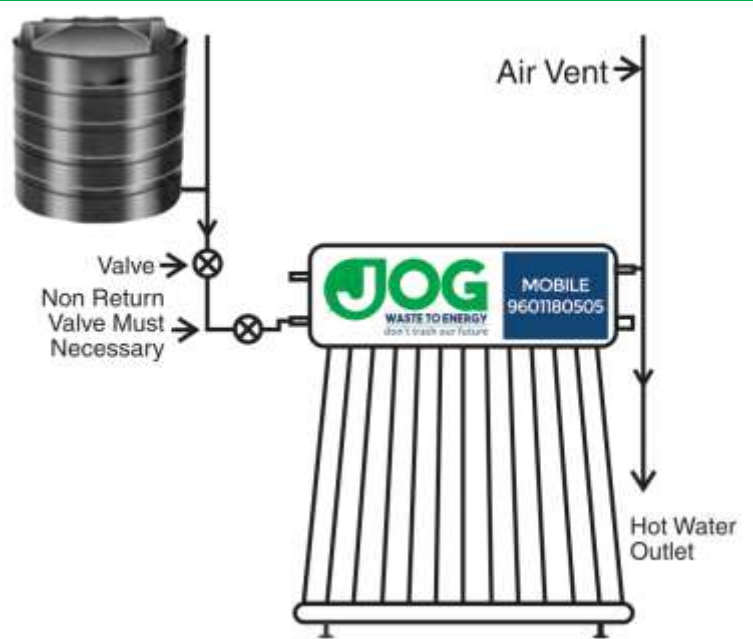

Manual Water Feeding System

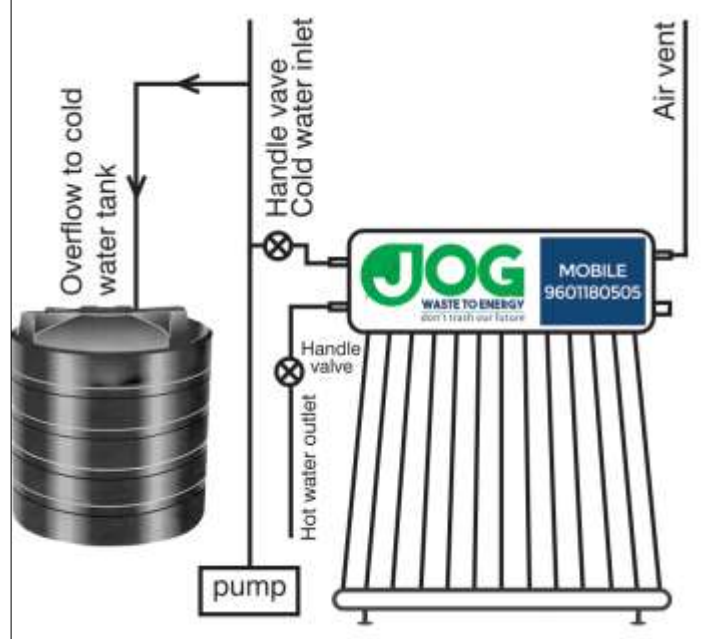

Area Required on Terrace By Solar Water Heater

Capacity in Litre	Required Area by System (NS*EW) in Feet
100 Litre	7.0 X 3.5
150 Litre	7.0 X 4.5
200 Litre	7.0 X 6.0
250 Litre	7.0 X 7.5
300 Litre	7.0 X 8.0
500 Litre	7.0 X 8.2

JOG WASTE TO ENERGY PVT LTD

421, Platinum Plaza, Opp Rajhans Cinema –
 Pavilion Mall, Nikol, Ahmedabad – 382350
 Gujarat, INDIA

E-mail – info@jogwte.com
mkt@jogwte.com

Mob – 9601180505, 9723269295
 Website - www.jogwte.com

* Terms and conditions apply